
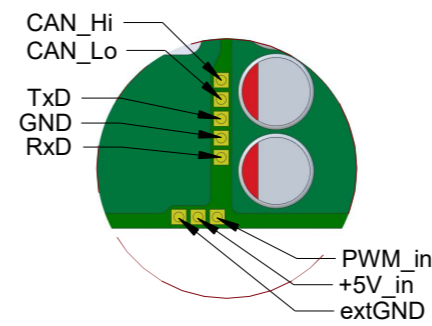


- isolated Alu-plate on bottom side for much better heat transfer to any external heatsink
- extended capacity up to 1.100µF, connected to +UZK
- UZK terminal can be used to add even more ELKOs
- signal terminals to be soldered
- precharge & mainswitch inside
- dimensions in mm

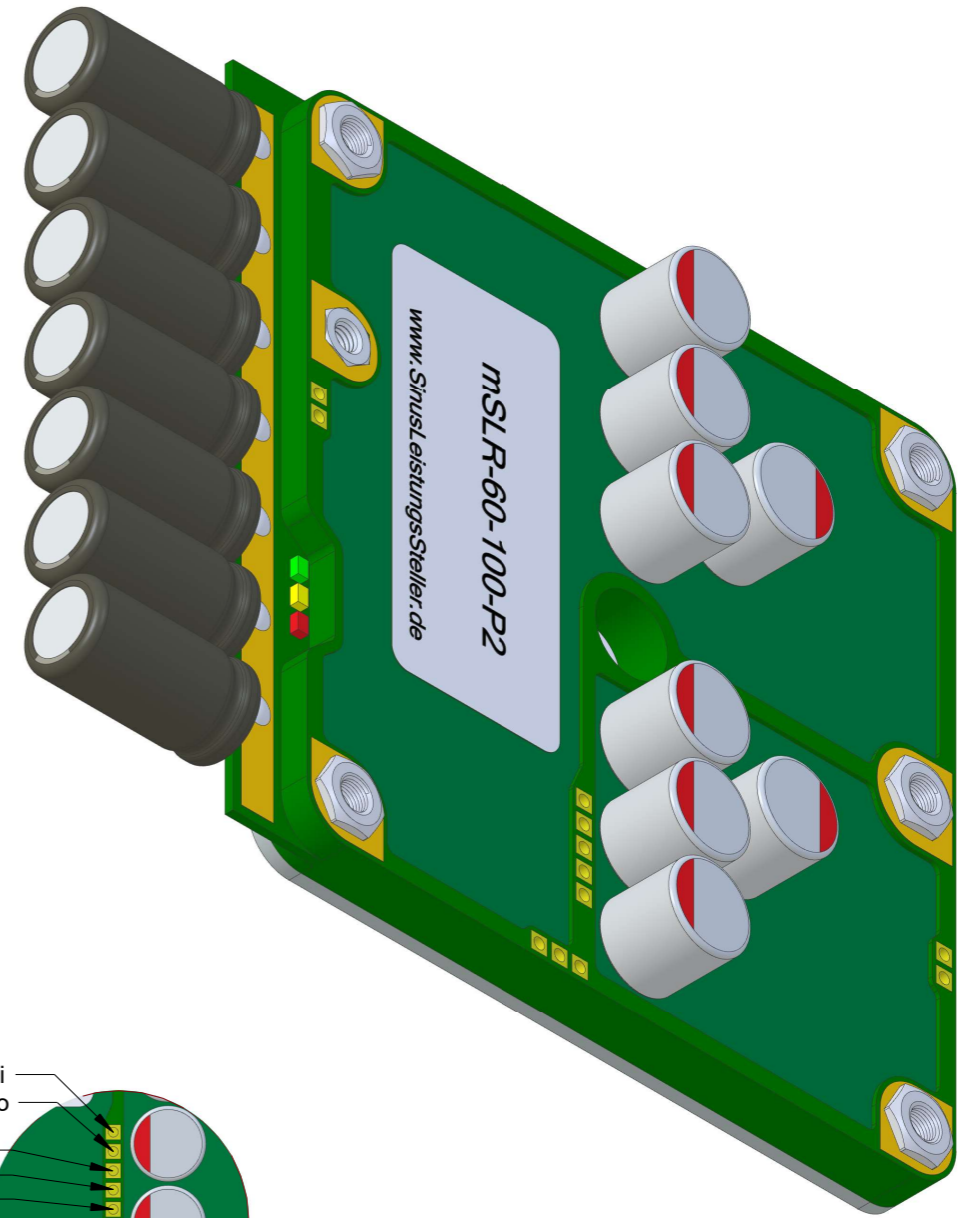

Detail A

Itemref	Quantity	Title/Name, designation, material, dimension etc	Article No./Reference		
Drawn by IBZ	Checked by	Approved by - date	File name	Date 07.12.2020	Scale 1:1
mSLR-60-100-P2 (c) Ing.-Büro Rolf Zimmermann www.SinusLeistungsSteller.de			mass: ca. 140g		Edition
					Sheet 1 von 1